



ControlNet Router

Quick Start Guide


A-CNTR

REQUIRED SOFTWARE

The ControlNet Router requires Aparian Slate software to setup and configure. The software installation can be found at www.aparian.com/software/slate.

MODULE INSTALLATION

The ControlNet Router requires input power of **10-36Vdc**. The wiring of the power and communication connector can be found in the wiring diagram below. The ControlNet Router communicates on both Ethernet and ControlNet. The Ethernet connector should be wired according to industry standards which can be found in the additional information section.

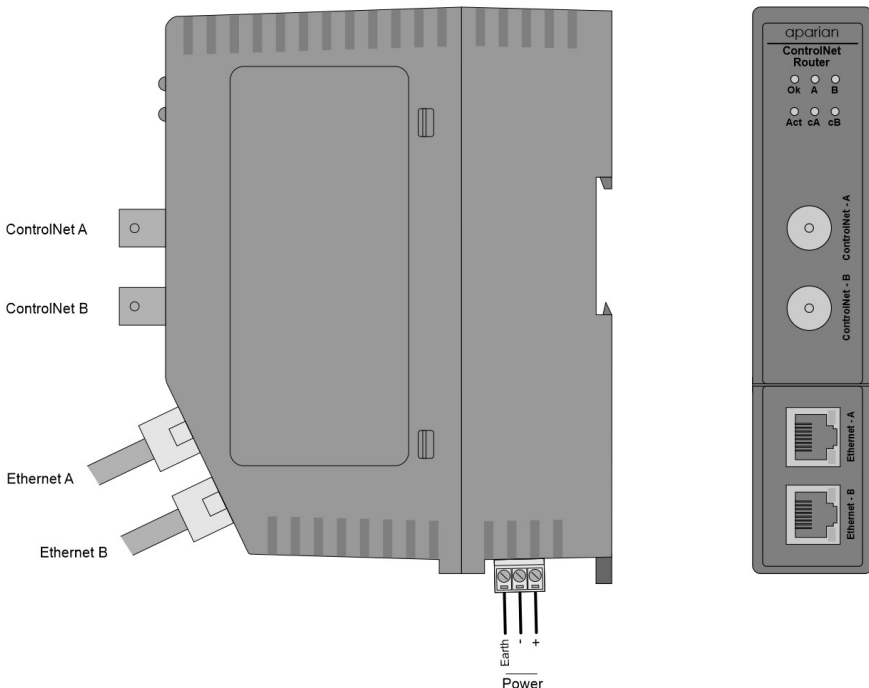

The ControlNet node address of the module is set using the Slate configuration software.

NETWORK SETUP

The ControlNet Router will have DHCP enabled as factory default. This the user must use a DHCP server to assign an Ethernet network address to the module. Refer to the additional information section for DHCP servers. Once the module has been assigned an Ethernet address the user can configure the module with Aparian Slate.

ADDITIONAL INFORMATION

The following resources contain additional information that can assist the user with the module installation and operation.

Resource	Link
Slate Installation	www.aparian.com/software/slate
ControlNet Router User Manual ControlNet Router Datasheet Example Code & UDTs	http://www.aparian.com/products/controlnetrouter
Ethernet wiring standard	www.cisco.com/c/en/us/td/docs/video/cds/cde/cde205_220_420/installation/guide/cde205_220_420_hig/Connectors.html

SUPPORT

Technical support will be provided via the Web (in the form of user manuals, FAQ, datasheets etc.) to assist with installation, operation, and diagnostics.

For additional support the user can use either of the following:

Contact Us web link	www.aparian.com/contact-us
Support email	support@aparian.com

